



Address: 21414 NE Sandy Blvd #B3
Fairview, OR 97024
Hours: 9 - 5 Monday—Friday
10 - 2 Saturday

Phone: 503-667-9358
Fax: 503-674-8538
Web: IronEagleTinyHouseTrailers.com

"You won't find a better trailer for less!"



PAD series

Trailer chassis designed exclusively for tiny houses.



Pictured above is a **PAD-14k24** equipped with optional **Galvanized Bottom Pan, Fender Flashing, and Leveling Jacks**

Our PAD series trailers are specifically engineered as a foundation for a tiny house. Every detail of the frame is tailored for supporting a tiny house structure and its contents. For example, the crossmember supports are recessed 6" below the top of the frame to accommodate floor insulation without sacrificing any floor height. This feature also minimizes contact of the steel framework to the subfloor for greater thermal efficiency. Our PAD series isn't simply a modified flatbed trailer; it's designed from the ground up for one purpose only . . . *to be the ultimate foundation for your tiny house.*

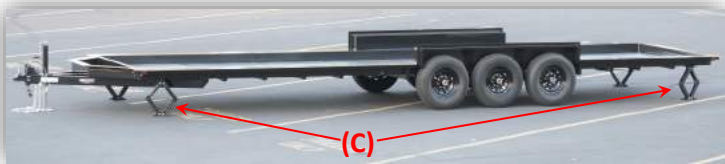

MODEL	LENGTH	AXLES**	GVWR	WEIGHT*	PRICE
PAD-5k10	10 Ft	(1) 5k	5,000	920	\$2455
PAD-5k12	12 Ft	(1) 5k	5,000	995	\$2550
PAD-10k14	14 Ft	(2) 5k	10,000	1,485	\$3415
PAD-10k16	16 Ft	(2) 5k	10,000	1,550	\$3540
PAD-10k18	18 Ft	(2) 5k	10,000	1,620	\$3670
PAD-10k20	20 Ft	(2) 5k	10,000	1,685	\$3795
PAD-14k22	22 Ft	(2) 7k	14,000	1,835	\$4375
PAD-14k24	24 Ft	(2) 7k	14,000	1,890	\$4530
PAD-14k26	26 Ft	(2) 7k	14,000	1,965	\$4780
PAD-20k28	28 Ft	(3) 7k	20,000	2,595	\$5990
PAD-20k30	30 Ft	(3) 7k	20,000	2,680	\$6430

AVAILABLE OPTIONS	WEIGHT	PRICE
(A) Galvanized Bottom Pan	10 Lbs/Lineal Ft	\$20/Lineal Ft
(B) Fender Flashing (Pair)	15 Lbs	\$120
(C) Leveling Jacks (Set of 4)	60 Lbs	\$260
(D) Rectangle Front Bumpout	115 Lbs	\$345
(E) Tapered Front Bumpout	95 Lbs	\$460

* Completed trailer weight in pounds.

** All axles are equipped with electric brakes.

Effective July 1st 2019

Dimensions on back side



21414 NE Sandy Blvd
Fairview, OR 97024
503-667-9358

Frame Length

	10**	12**	14'	16'	18'	20'	22'	24'	26'	28**	30**
A	120"	144"	168"	192"	216"	240"	264"	288"	312"	336"	360"
B	110"	134"	158"	182"	206"	230"	254"	278"	302"	326"	350"
C	55"	69"	69"	84"	98"	113"	125"	142"	157"	148"	164"
D	32"	42"	36"	45"	55"	64"	72"	79"	88"	89"	97"
E	33"	33"	63"	63"	63"	63"	67"	67"	67"	99"	99"

* Equipped with a single 5200 Lb axle

** Equipped with triple 7000 Lb axles

